


NOTES:

- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
- 3.CODING INFORMATION: MB2xx-GxxS-B1R

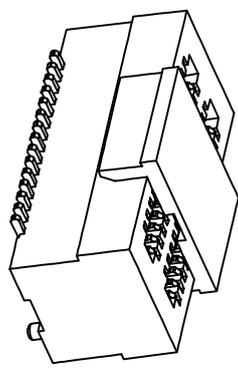






MATING HEIGHT
SCALE:1:25:1

3D VIEW

PACKING: R: CARRIER REEL
WITH CAP TYPE
COLOR:BLACK
SOCKET
PIN
PLATING: G:GOLD FLASH
0.5 BITB
MATING HEIGHT: 3.0H:3.5--3.5H;
4.0--4.0H:4.5--4.5H;

MATING HEIGHT (H)	PLUG (H)	SOCKET (H)
3.0	0.8	2.2
3.5	1.3	2.2
4.0	1.0	3.0
4.5	1.0	3.5
5.0	1.0	4.0
5.5	1.0	4.5
6.0	2.0	4.0
6.5	2.0	4.5

此规格公母座从70PIN~100PIN 数量 发生变更
此规格公母座从70PIN~100PIN 颜色 发生变更
PLATING: 2L:GOLD SOCKET(D): 3:GOLD

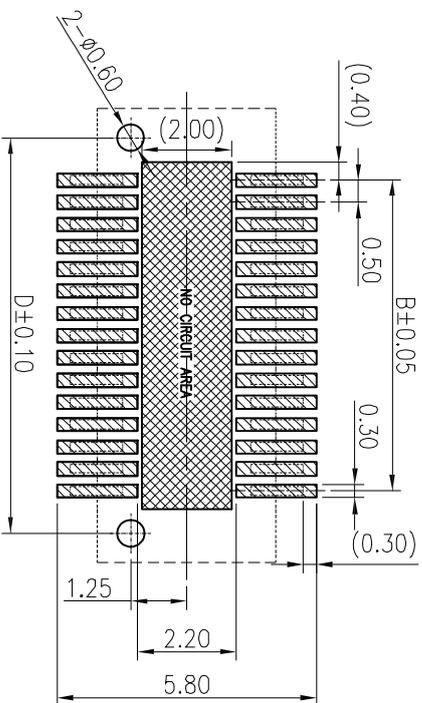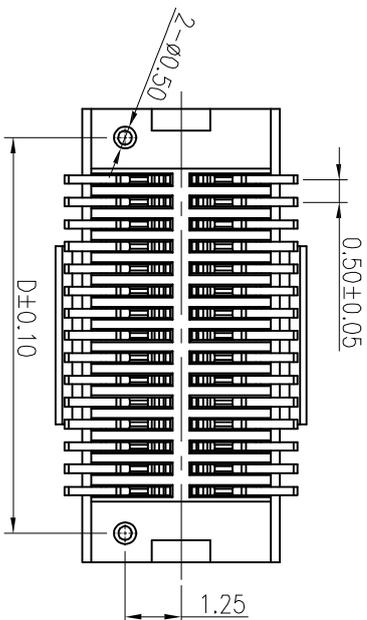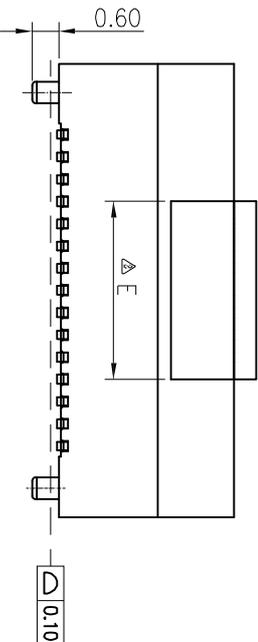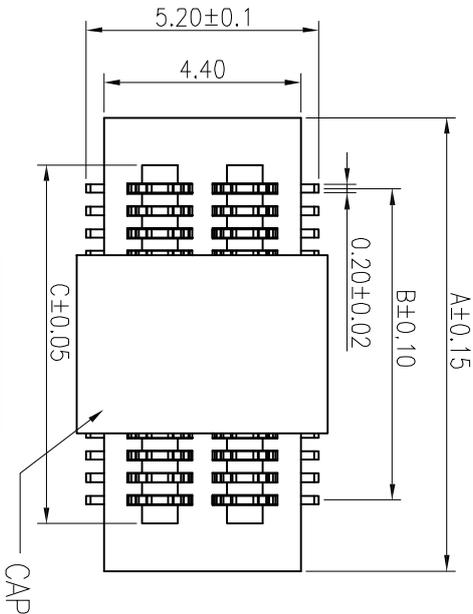

RECOMMENDED PCB PATTERN DIM.
TOLERANCE: ±0.05

No. of nicks	Dimensions					No. of contacts	Dimensions				
	A	B	C	D	E		A	B	C	D	E
4	3.70	0.50	1.36	2.40		54	16.20	13.00	14.06	14.90	
6	4.20	1.00	2.06	2.90		56	16.70	13.50	14.56	15.40	
8	4.70	1.50	2.56	3.40		58	17.20	14.00	15.06	15.90	
10	5.20	2.00	3.06	3.90		60	17.70	14.50	15.56	16.40	
12	5.70	2.50	3.56	4.40		62	18.20	15.00	16.06	16.90	
14	6.20	3.00	4.06	4.90		64	18.70	15.50	16.56	17.40	
16	6.70	3.50	4.56	5.40		66	19.20	16.00	17.06	17.90	
18	7.20	4.00	5.06	5.90		68	19.70	16.50	17.56	18.40	
20	7.70	4.50	5.56	6.40	4.00	70	20.20	17.00	18.06	18.90	
22	8.20	5.00	6.06	6.90		72	20.70	17.50	18.56	19.40	
24	8.70	5.50	6.56	7.40		74	21.20	18.00	19.06	19.90	
26	9.20	6.00	7.06	7.90		76	21.70	18.50	19.56	20.40	8.0
28	9.70	6.50	7.56	8.40		78	22.20	19.00	20.06	20.90	
30	10.20	7.00	8.06	8.90		80	22.70	19.50	20.56	21.40	
32	10.70	7.50	8.56	9.40		82	23.20	20.00	21.06	21.90	
34	11.20	8.00	9.06	9.90		84	23.70	20.50	21.56	22.40	
36	11.70	8.50	9.56	10.40		86	24.20	21.00	22.06	22.90	
38	12.20	9.00	10.06	10.90		88	24.70	21.50	22.56	23.40	
40	12.70	9.50	10.56	11.40		90	25.20	22.00	23.06	23.90	
42	13.20	10.00	11.06	11.90	8.00	92	25.70	22.50	23.56	24.40	
44	13.70	10.50	11.56	12.40		94	26.20	23.00	24.06	24.90	
46	14.20	11.00	12.06	12.90		96	26.70	23.50	24.56	25.40	
48	14.70	11.50	12.56	13.40		98	27.20	24.00	25.06	25.90	
50	15.20	12.00	13.06	13.90		100	27.70	24.50	25.56	26.40	

MITCONN PRECISION ELECTRONICS CO.,LTD

DIM	TOL	DEC	TOL	DEC	TOL
X.	±--	X.	±2*		
X.X	±0.25*	X.X*	±2		
X.XX	±0.15	X.XX*	±--		
X.XXX	±0.10	X.XXX*	±--		

DRWVN:	NICK	2010-04-23	PART NO.:	MB2xx-GxxS-B1R
CHKD:	JOHNSON <td>2010-04-23 <td>TITLE:</td> <td>BTBD.5MM 双槽母座 系列</td> </td>	2010-04-23 <td>TITLE:</td> <td>BTBD.5MM 双槽母座 系列</td>	TITLE:	BTBD.5MM 双槽母座 系列
APPD:	JUDY <td>2010-04-23 <td>DRAWING NO.:</td> <td>MB2xx-GxxS-B1R</td> </td>	2010-04-23 <td>DRAWING NO.:</td> <td>MB2xx-GxxS-B1R</td>	DRAWING NO.:	MB2xx-GxxS-B1R
SHEET:	1/1		UNIT:	mm
			SCALE:	N/A
			SIZE:	A4
			REV:	E